



HyVibe H1 - H2 Upgrade Installation Guide




1. Unplug the cables from the H1

Loosen or remove the strings of the guitar so you are able to fit your hand inside the guitar. Then with your hand inside the soundhole, unplug all of the cables from the H1. The inside of the guitar looks like this:



2. Unscrew and Remove the H1

Unscrew the 4 top-screws of HyVibe System using a Phillips screwdriver. Pull the H1 out of the guitar.

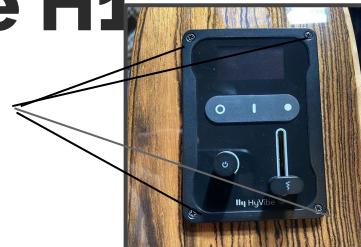




3. Connect & Attach HyVibe Link to the H2

HyVibe Link into the H2, remove the adhesive from the Link and press the Link firmly against the H2.





3. Prepare cables

Gently pull the cables from the guitar through the hole on the side, enough so they can be plugged into the Link and H2.

If the cables do not reach outside the hole after a gently pulling them, you can bend open the metal clips that hold the cables on the side of the guitar.





4. Plug cables into Link and H2

Plug the following into the Link:

- USB-C
- Input jack (white sheathed cable)
- Output jack (black sheathed cable)

Plug the following into the H2

- Actuators (braided gray and black cable)
- Piezo sensor (round metal tip)





4. Insert H2 into guitar

Insert the H2 into the guitar, cables first, then by wedging the side of the guitar under the lip of the H2 as shown in this picture.

Turn on the H2 and test that the effects are working. If so, tighten the 4 screws, and start vibing! If not, remove the H2 and verify that all the cables are properly installed.

If you have questions please contact us at:
contact@hyvibe.audio

